

Partizan PAM-E12.NET





- 1 Door controller
- Max number of users 30 000
- Max number of events 60 000
- Fire alarm out
- Built-in web interface
- Ethernet interface
- Free professional Software


Model Version Communication interface Version Communication interface Version Communication interface Version	Network controller		
Version			PAM-E12.NET
Number of readers			-
Card reader interface Weigand 26/34 Card reader standard EM-Marin Reader frequency 125KHz Max number of events 60 000 Communications interface Accessories - Door sensor, pcs. 1 Exit button, pcs. 1 Fire unlock + Non-volatile memory + Fire alarm Inputs, pcs. 1 Outputs, pcs. 1 Juputs, pcs. - Outputs, pcs. - Quiputs, pcs. - Outputs, pcs. - Lock output Electromechanical lock - Lock output Electromechanical lock - Communication distance Without limitation Communication interface TCP/IP Data protection if no power supply, year Network Ethernet + <td colspan="2"></td> <td>1</td>			1
Card reader interface Weigand 26/34 Card reader standard EM-Marin Reader frequency 125KHz Max number of events 60 000 Communications interface Accessories - Door sensor, pcs. 1 Exit button, pcs. 1 Fire unlock + Non-volatile memory + Fire alarm Inputs, pcs. 1 Outputs, pcs. 1 Outputs, pcs. - Use (a) 3, 5A Electromechanical lock - TCP/IP - Data protection if no power supply, year			2(1 built-in Em Marin)
Card reader standard EM-Marin Reader frequency 125KHz Max number of everts 30 000 Max number of everts 60 000 Communications interface Accessories - Door sensor, pcs. 1 Exit button, pcs. 1 Fire unlock + Non-volatile memory + Fire alarm Inputs, pcs. 1 Outputs, pcs. 1 Inputs, pcs. - Outputs, pcs. - Communication interface TCP/IP <tr< td=""><td colspan="2"></td><td></td></tr<>			
Max number of users 30 000 Max number of events 60 000 Communications interface Accessories - Door sensor, pcs. 1 Exit button, pcs. 1 Fire unlock + Non-volatile memory + Fire alarm Inputs, pcs. 1 Outputs, pcs. 1 Outputs, pcs. - Outputs, pcs. - Outputs, pcs. - Outputs, pcs. - Quiputs, pcs. - Outputs, pcs. - Quiputs, pcs. - Quiputs, pcs. - Quiputs, pcs. - Quiputs, pcs. - Malarm 3,5A Electromechanical lock - Magnetic lock - Communication interface Without limitation Network + Ethernet + Web-interface + Languages English Def			
Max number of events 60 000 Communications interface Accessories - Door sensor, pcs. 1 Exit button, pcs. Tire unlock Non-volatile memory + Fire alarm Inputs, pcs. 1 Outputs, pcs. 1 Outputs, pcs. - Coutputs, pcs. - Relay, pcs. (A) 3, 5A Electromechanical lock Magnetic lock - Communication distance Without limitation Communication interface TCP/IP Data protection if no power supply, year Network Ethernet + Web-interface + Languages English Default IP address Set on the device sticker Login admin Password 888888 Web port 80 Software supported Partizan ACM Mobile software Poimensions Size, mm 125x83x22			125KHz
Communications interface			30 000
Accessories			60 000
Door sensor, pcs.	Communications interface		
Exit button, pcs.	Accessories		-
Fire unlock	Door sensor, po	cs.	1
Non-volatile memory	Exit button, pcs	· ·	1
Fire alarm Inputs, pcs. 1	•		+
Fire alarm Outputs, pcs. Alarm Inputs, pcs. Outputs, pcs. Relay, pcs. (A) Relay, pcs. (A) Electromechanical lock Magnetic lock Communication distance Communication interface Data protection if no power supply, year Network Ethernet Web-interface Languages Default IP address Login Password Web port Software supported Mobile software Dimensions Size, mm Power Common Power Casing material IP rating IK rating Operating temperature, °C Relay, pcs. A 1 Inputs, pcs. - Outputs, pcs. - Un Without limitation TCP/IP Data protection if no power supply, year Neithout limitation Fuel III A should limitation A should limitation TCP/IP Data protection if no power supply, year 10 Network Ethernet + ### H ##	Non-volatile memory		+
Alarm Inputs, pcs. 1	Fine eleman	Inputs, pcs.	1
Alarm Outputs, pcs Relay, pcs. (A) 3, 5A Electromechanical lock - Magnetic lock - Communication distance Without limitation Communication interface TCP/IP Data protection if no power supply, year 10 Network Ethernet + Web-interface + Languages English Default IP address Set on the device sticker admin admin Password 888888 Web port 80 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Prating 55 IK rating - Operating temperature, °C -20 - +50	Fire alarm	Outputs, pcs.	1
Outputs, pcs. - Relay, pcs. (A) 3, 5A Electromechanical lock - Magnetic lock - Communication distance Without limitation TCP/IP Data protection if no power supply, year 10 Network Ethernet +		Inputs, pcs.	-
Electromechanical lock -	Alarm	Outputs, pcs.	-
Magnetic lock - Communication distance Without limitation Communication interface TCP/IP Data protection if no power supply, year 10 Network Ethernet + Web-interface + Languages English Default IP address Set on the device sticker Login admin Password 888888 Web port 800 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50		Relay, pcs. (A)	3, 5A
Communication distance TCP/IP Data protection if no power supply, year 10 Network Ethernet + Web-interface + Languages English Default IP address Set on the device sticker Login admin Password 888888 Web port 800 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Prating 55 IK rating - Operating temperature, °C -20 - +50	Lock output	Electromechanical lock	-
Communication distance TCP/IP Data protection if no power supply, year 10 Network Ethernet + Web-interface + Languages English Default IP address Set on the device sticker Login admin Password 888888 Web port 800 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Prating 55 IK rating - Operating temperature, °C -20 - +50	·	Magnetic lock	-
Data protection if no power supply, year10Network+Ethernet+Web-interface+LanguagesEnglishDefault IP addressSet on the device stickerLoginadminPassword888888Web port800Control port8000Software supportedPartizan ACMMobile software-DimensionsSize, mm125x83x22Weight, g90CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50			Without limitation
NetworkEthernet+Web-interface+LanguagesEnglishDefault IP addressSet on the device stickerLoginadminPassword888888Web port80Control port8000Software supportedPartizan ACMMobile software-DimensionsSize, mm125x83x22Weight, g90CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50			TCP/IP
NetworkEthernet+Web-interface+LanguagesEnglishDefault IP addressSet on the device stickerLoginadminPassword888888Web port80Control port8000Software supportedPartizan ACMMobile software-DimensionsSize, mm125x83x22Weight, g90CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50			10
Web-interface+LanguagesEnglishDefault IP addressSet on the device stickerLoginadminPassword888888Web port80Control port8000Software supportedPartizan ACMMobile software-DimensionsSize, mm125x83x22Weight, g90CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50			
Languages Default IP address Set on the device sticker admin Password 888888 Web port 80 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material IP rating IK rating Operating temperature, °C Pet on the device sticker admin 288888 890 Control port 800 Partizan ACM Partizan ACM Partizan ACM Plastic Plastic 20 - +50			+
Default IP address Login Password 888888 Web port Control port Software supported Mobile software	Web-interface		+
Default IP address Login Password 888888 Web port Control port Software supported Mobile software Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material IP rating IK rating Operating temperature, °C Password 888888 800 Partizan ACM Partizan ACM Pout Pout Pout 125x83x22 Plastic Plastic	Languages		English
Password 888888 Web port 80 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50			
Password 888888 Web port 80 Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Login		admin
Control port 8000 Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50			888888
Software supported Partizan ACM Mobile software - Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Web port		80
Mobile software Dimensions Size, mm	Control port		8000
Dimensions Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Software supported		Partizan ACM
Size, mm 125x83x22 Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Mobile software		-
Weight, g 90 Common Power DC 12V/150mA Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Dimensions		
CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50	Size, mm		125x83x22
CommonPowerDC 12V/150mACasing materialPlasticIP rating55IK rating-Operating temperature, °C-20 - +50	Weight, g		90
Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Common		
Casing material Plastic IP rating 55 IK rating - Operating temperature, °C -20 - +50	Power		DC 12V/150mA
IP rating 55 IK rating - Operating temperature, °C -20 - +50	Casing material		Plastic
IK rating - Operating temperature, °C -20 - +50			55
Operating temperature, °C -20 - +50			-
		perature, °C	-20 - +50

^{*}Note: the functions, interface, component parts and the working sequence of the device are subject to alteration without prior notice from the manufacturer due to updates of the device itself as well as its software.



Installation manual



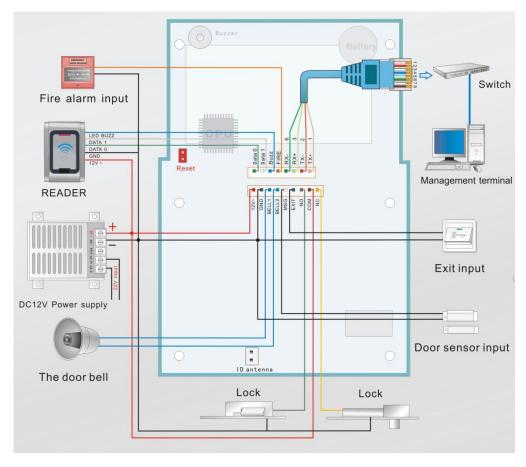

^{*}Note: the colour marking of the wires may vary from the one used in the scheme. Please check the code marking compliance for the correct connection of the device.

Precautionary measures

- Do not connect the controller to the power supply from unstabilized power, this can lead to fire, electric shock or other hazards.
- Power supply and operating temperature must correspond the performance requirements of the product.
- Do not install the controller near a radiator or heaters.
- Do not use the controller without lightning protection equipment.
- The manufacturer is not responsible and will not reimburse damages for defects caused by the fault of the consumer at non-compliance with the rules of operation and installation.
- Do not attempt to repair, as this will void the warranty. If you have any fault,
 please contact your dealer or certified service center.
- Be sure to read the conditions of the warranty services that are included.